


CODE	Weight kg/pc	Volume m ³ /pc	Dn	D1	D	L1 min	L	H1	H
03NT16	0,019	0,00004	16	13	24	13	47	24	35,5
03NT20	0,025	0,00006	20	18	29	14,5	54	27	41,5
03NT25	0,042	0,00011	25	21	35	16	63	31,5	49
03NT32	0,083	0,0002	32	30	46	18	74	37	60
03NT40	0,127	0,00034	40	36	56	20,5	86	43	71
03NT50	0,234	0,00061	50	46	70	23,5	102	51	86
03NT63	0,395	0,00116	63	59	88	27,5	124	62	106
03NT75	0,581	0,00182	75	70	101	31	146	73	123,5
03NT90	1,028	0,0031	90	84	124	35,5	170	85	147
03NT110	1,65	0,00505	110	100	146	41,5	200	100	173
03NT125	2,833	0,00856	125	113	165	46,5	250	125	207,5



NOTE: Lengths of sockets for socket fusion fittings of type B as from ISO 15874-3 standard

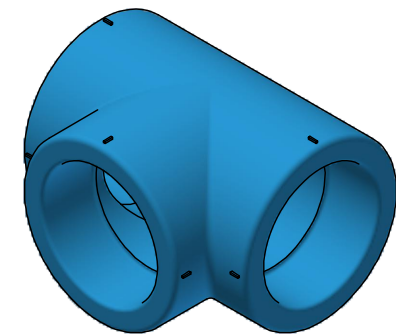

SISTEMA
NIRON

ITEM:

NT

DESC: TEE 90°
90° TEE

C:\Vault_Temp\Disegni\Schede Tecniche\Niron Blue metric\Socket Fusion Fittings\NI10309.dwg



DRAWING No:
NI10309

SHEET OF	REV.
1 1	-2

www.nupiindustriaitaliane.com - info@nupinet.com

All dimensions have to be considered in millimeters with 5% tolerance if not otherwise mentioned excluding values as per standard EN ISO 15874